




Shopping List	Cut List
3 – 1x6 @ 8 feet long 2 – 1x3 @ 8 feet long 1 – ¼" plywood 24" x 48" 5 feet of ¼" dowels 4 caster wheels and screws	Bottom Tray 2 – 1x6 @ 17-1/2" 2 – 1x6 @ 15" 1 – 1x6 @ 16" 1 - ¼" plywood @ 15" x 17-1/2" TOP TRAYS 4 – 1x3 @ 17-1/2" 4 – 1x3 @ 15" 2 – 1x3 @ 16" 1 – 1x3 @ 5" 2 – ¼" plywood @ 11" x 17-1/2" SIDES 6 – 1x6 @ 31" RIBBON HOLDERS 2 – 1x3 @ 12" 3 – ¼" dowels @ 17-1/2"

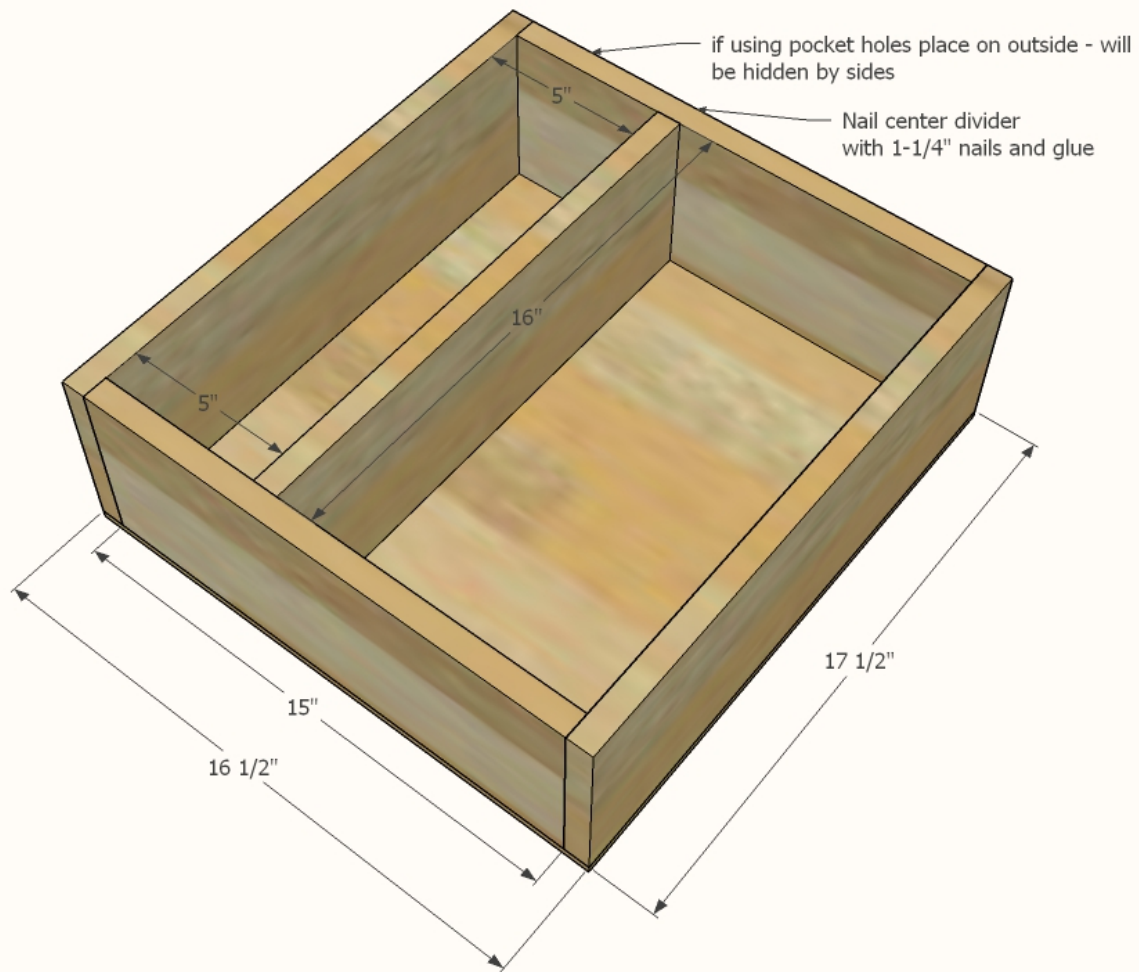


Step 1: Build the bottom tray. 1x6s can be attached with $1\frac{1}{4}"$ pocket hole screws or 2" self tapping screws. The divider can be nailed or screwed in place. Attach bottom plywood with glue and $\frac{3}{4}"$ finish nails.

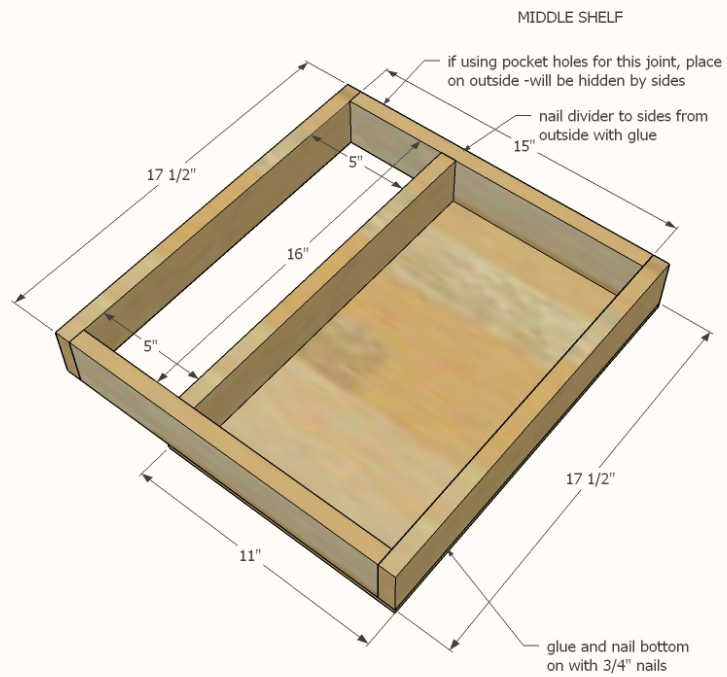


Step 2: Build the two smaller frames, but only cover the larger portion of the tray bottom in plywood.

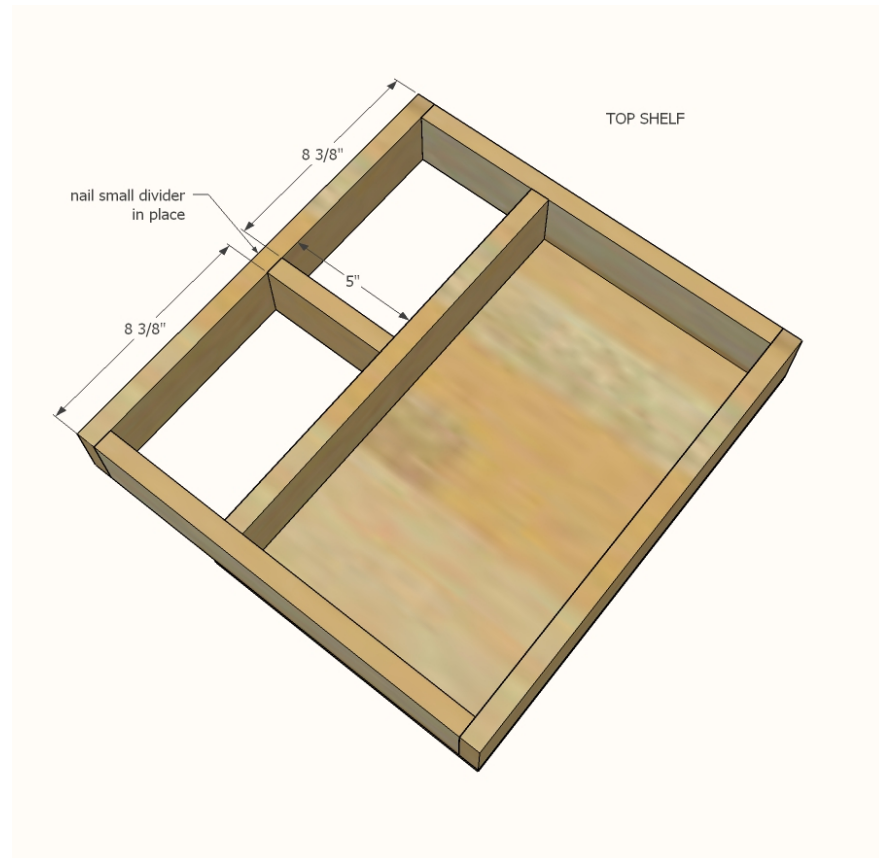

Step 3: For the top tray add a divider in the center. This divider will allow you to place 30" rolls of paper in the back compartment without them falling out.

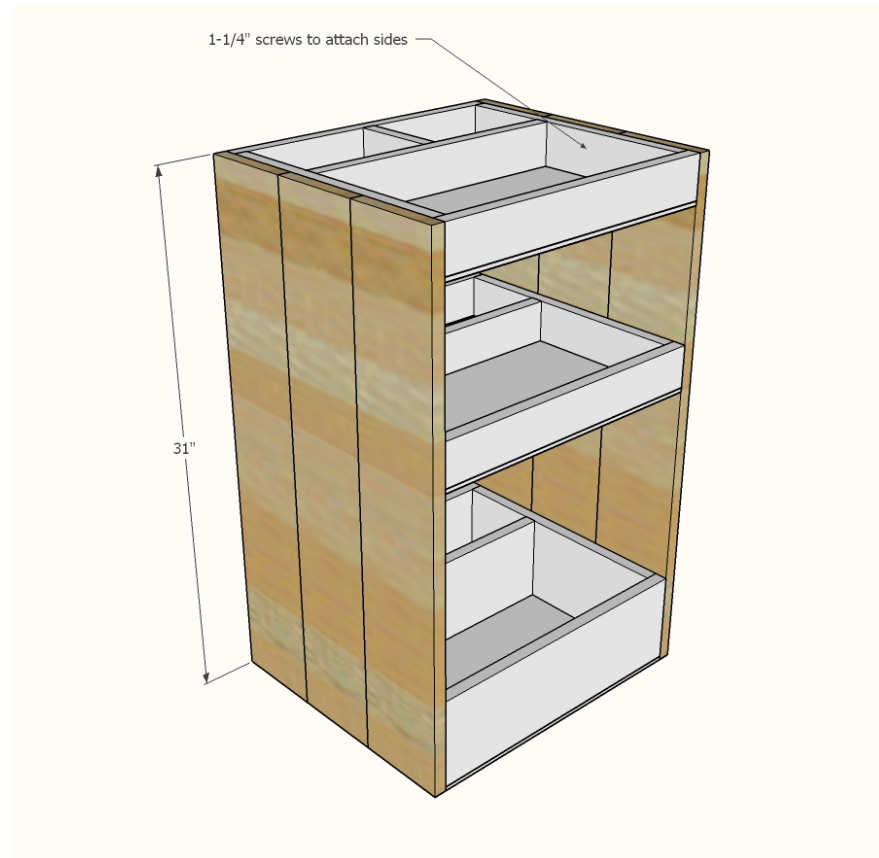

Step 4: Attach the sides to the three trays. I attached the outer 1x6 boards first, and then centered the remaining middle 1x6 leaving small gaps in between.

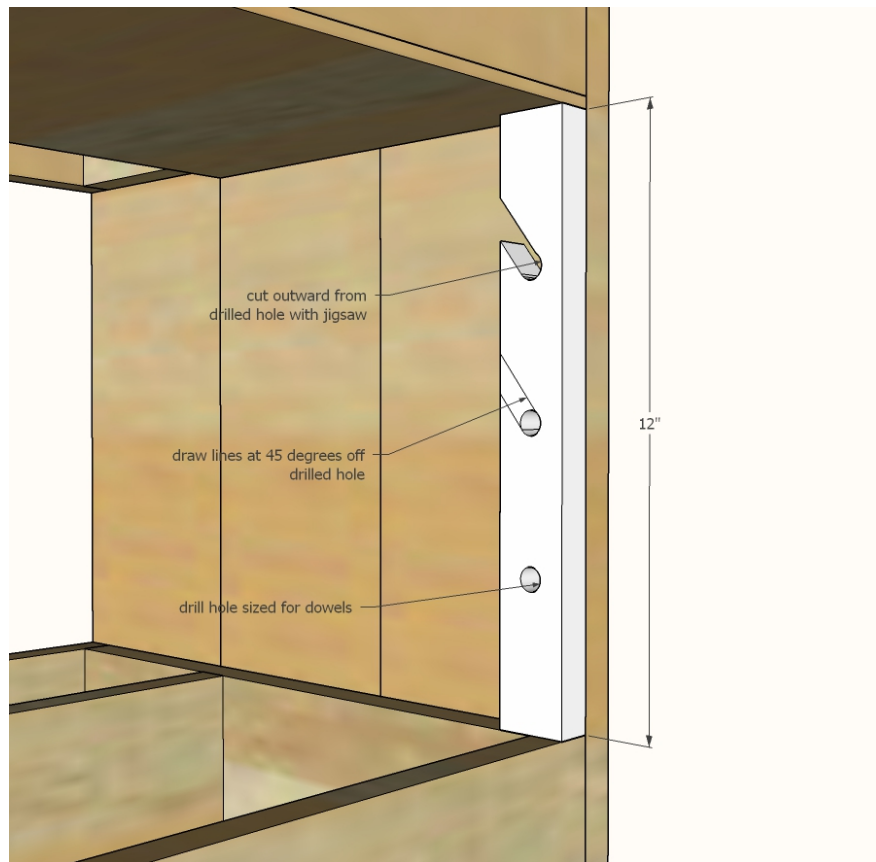

Step 5: The ribbon holder is easy to make. Just drill holes in a 1x3 board in the center where you'd like your ribbon dowels to be placed. Then, starting from the hole, cut outward with a jigsaw to create a channel for the dowels to slide in. Attach the 1x3 to the inside of the project with 1-1/4" screws (so it can be removed too).



Step 6: Attach caster wheels to base of project with screws.